


NOTE:
1/16" TOLERANCE
ALLOWED FROM CENTERLINE
FOR EMBOSSMENT LOCATIONS
TOP TO BOTTOM
AND SIDE TO SIDE.

NOTE:
THIS LAYOUT BASED ON:
3'0" X 6'8" EMBOSSED DOOR
FOR 7'0 DOORS
EMBOSSMENT LOCATION
DIFFERENCE IS SPLIT BETWEEN
TOP AND BOTTOM RAILS

EMBOSSMENT SECTION B-B

SCALE 2X
ALL DIMENSIONS (T.S.C.) TO SHARP CORNER

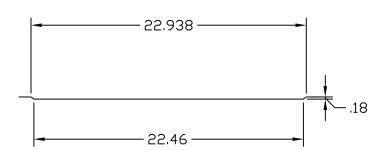



2 PANEL FLAT (SHAKER)
ADA EMBOSSMENT OPTION
FOR STEEL DOORS

DWG#
II-20Tada
DATE
1-15-19
NAME
KRB
SECTION
II
PAGE
20Q

THIS MATERIAL IS PROPRIETARY AND CONFIDENTIAL TO TAYLOR ENTRANCE SYSTEMS AND SHALL NOT BE REPRODUCED, COPIED OR DISSEMINATED WITHOUT THE EXPRESS WRITTEN PERMISSION OF TAYLOR ENTRANCE SYSTEMS.